

NOTICE NO. JGB/RO-V/ACCT/2025-26/47

Date : 16.03.2026

Notice for Inviting Quotation for Procurement of furniture, electrical and LAN Cabling work at our new Branch premises of Korambey Branch

Jharkhand Gramin Bank, Regional Office, Hazaribagh invites sealed quotations in two bids system from bonafide registered supplier/firm for procurement of furniture items, electrical and LAN Cabling items for interior furnishing, electrical and LAN Cabling work at new Branch premises of Korambey Branch at Korambey, PS-Gola Dist- Ramgarh as per layout plan (Annexure-III) and detailed specification mentioned in Annexure-II. Detail of proposed premises is as under- L.B.Bhawan H/O Rajendra Prasad, Vill. + P.O.- Korambey, P.S.-Gola, Dist- Ramgarh (Jharkhand).

The interested firm /Supplier may visit on above address to assess their cost and submit their Technical details & Financial quotation documents in prescribed format in separate sealed cover.

The estimated cost for aforesaid work is Rs. 4,94,565/- approx. excluding GST (including all taxes/transportation and labour charges).

Intending eligible firm may download quotations/bid documents from tender section of our Bank's website -jrgbank.bank.in from 16.03.2026 to 25.03.2026 till 4.00 PM.

Technical & Financial documents **sealed in separate covers** must be delivered to Accounts Department, Jharkhand Gramin Bank, Regional Office, Hazaribagh situated at Gurubabban Complex, Near Aditya Vision, Babugaon Chowk, Korrah, Hazaribagh **by 25.03.2026 till 4:00 PM**. Quotations will be opened on 27.03.2026 at 11.00 AM.

If the last date of bid dropping/opening of quotations paralyzed due to unforeseen reason(s), then it shall be done on the next working day. The undersigned reserves the right to accept or reject any or all the quotations without citing any reason whatsoever.

Sd/-
Regional Manager
JGB, R.O., Hazaribagh

Terms & Conditions

1. Delivery Place:

Bidder will supply and deliver the work at proposed new Branch premise of Korambe Branch at L.B.Bhawan H/O Rajendra Prasad, Vill. + P.O.- Korambey, P.S.-Gola, Dist-Ramgarh (Jharkhand) and the cost of transportation will be borne by the supplier.

2. Bid Price:

- a) All duties, taxes and other levies including the transportation expenses are payable by the firm under the contract and shall be included in total price.
- b) Each bidder shall submit only one quotation in the format supplied. Bidder submitting more than one quotation for the same package will not be entertained.
- c) All the columns and requisite information's must be filled in the supplies Format.

3. Submission of Quotations/Bid:

- a) Each bidder should submit quotations in sealed envelope which will contain separate sealed envelope of Technical & Financial quotation.

4. Credentiality Certificate:

4.1.Specification of item (as applicable)

- a) The Financial part (Part-II(a) & (b))of the bid shall consists of only Rate/Price on the Firm's letter pad. All the column and requisite information must be filled in the prescribed format.Bidder must quote the item wise Rate.
- b) Award of contract on the basis of lowest evaluated price for which the bidder must quote the rate per item. Bidder must quote the rate of all items.

5. Evaluation of Quotations:

The Jharkhand Gramin Bank will evaluate and compare quotations determined to be substantially responsive i.e.

- a) Are properly signed
- b) Confirm to terms,conditions,specifications and qualifications conditions.

6. Tender/Bid Fee(non-refundable)

- a) **Tender fee of Rs. 2000/- in form of DD favouring "Jharkhand Gramin Bank" payable at Hazaribagh to be deposited separately with the Technical documents.** Any Bid not accompanied by the requisite Tender Cost shall be deemed to be invalid and will be rejected. (Exempted for MSME units subject to submission of required certificate in this regard)
- b) The L-1 vendor selected has to deposit performance guarantee amount (10% of invoice price) in form of (i) Discharged Fixed Deposit of JGB for one year or (ii) Bank Gaurantee in favour of Jharkhand Gramin Bank for one year.

7. Award of Contract:

The Jharkhand Gramin Bank will award the contract to the bidder whose quotations has been determined to be substantially responsive and who has offered the lowest evaluated quoted price. A) Notwithstanding the above, the purchaser reserves the right to accept or reject any quotations and to cancel the bidding process and reject all quotations at any time prior to the award of the contract.

8. Other Terms & Conditions:

- (a) Jharkhand Gramin Bank reserves the right to prepone/postpone/cancel the bid. The bidder will have to abide with the decision.
- (b) Payment shall be made after the Completion of work and submission of bills which will be subject to satisfactory vetting of work by the Architect who will certify the quality and quantity of the items supplied/work done as per specifications and recommend accordingly the extent of payment.
- (c) No preference will be given to any bidder of class of bidders, either for the price or for other terms and conditions.
- (d) Quotation may be submitted on the printed letter head of the bidder in the prescribed format supplied.
- (e) No payment will be made for any damage of goods supplied.

We look forward to receiving your quotations and thank you for your interest in this project.

Sd/-

REGIONAL MANAGER

PROFORMA FOR TECHNICAL BID (PART-I)

Sl.	Particulars	To be filled in by the firm
1.	Name of the supplier/Agency	
2.	Detailed office address of the supplier/Agency with Office Telephone Number, Fax Number and Mobile Number and name of the contact person	
3.	PAN/TAN Number (copy to be enclosed)	
4.	Sales Tax/VAT/GST Registration Number (copy to be enclosed)	
5.	Whether bid document of all pages of the terms and Conditions duly signed, in token of acceptance of the same, is attached	
6.	Whether agency profile is attached?	

Date :

Signature of the Bidder with Office Seal

Place :

PROFORMA FOR FINANCIAL BID (PART-II (a))

Estimate for Interior Furnishing work at proposed premises at Jharkhand Gramin Bank, Korambey Branch (Dist-Ramgarh)					
Sl.	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
1.	<u>HALF HEIGHT PARTITIONS PARTLY PANELED AND PARTLLY GLAZED - BM CABIN (4'-6" Ht.)-</u> Providing and fixing double skin full height partly glazed partition made out of aluminum hollow section of 50X25X1.5 mm as internal framed structure spaced not more than 600 mm. c/c both ways, double skin partition fixed to aluminium frame made of 6 mm. thk. approved ply (IS:303), finished both side with approved laminate with 1.0 mm. thickness including the glazing part made with 06 mm thick clear glass of Modi/saint gobin with etching film in the partition as per drawing size including supply and fixing of hardware all complete with as per drawing.	SFT	95.00		
2.	<u>BRANCH MANAGER TABLE-</u> Providing & erecting in position free standing table made of 19 mm ply wood (IS:303) forsides, top & panel, finished with 1.0 mm laminate & inside surfaces finished with 0.7 mm liner laminate. Drawer cum cabinet unit of approx. overall size of 400x600x725 mm. (h) of 19 mm. thk. plywood. The unit shall comprise of 1 drawer, 1 cabinet with approved shade with telescopic drawer slides. The drawer & cabinet unit shall be finished with 1.0 mm laminate & inside surfaces finished with 0.70 mm liner laminate. The quoted price should include cost of teak wood moulding/ laminate to edges, wood lapping, multi locks of Godrej/EBCO make & other necessary hardware accessories including SS handles, PVC wire manager, key board tray, CPU trolley, foot rest etc. of approved quality. All the ply edges should be lipped & finished with laminate. The rate also include the cost of hardware like hinges, tower bolts, handles, magnets, wire manager etc. Size : 6'0" X 3'0" Including 12mm clear float glass at top with edge polishing.	EACH	1.00		
3	<u>BACK STORAGE (4'- 6" HEIGHT) CABINETS IN B.M. CHAMBER-</u> Providing and fixing Sides to rage unit of 3'-6" long, 1'-6" depth or width as mentioned in the drawing made with Front shutter of 19 mm thk ply and horizontal and vertical rack with 19 mm thk. Board of approved make all complete with necessary hardware, locking arrangement, handle. There shall be horizontal self. All exposed surface should be finished with 1.0mm thk. laminate of approved make and shade and internal surface should be paint and polished as per drawing and direction. There shall be provision of horizontal and vertical rack inside the alcove as per design.	SFT	24.50		
4	<u>FULL HEIGHT PARTITIONS PARTLY PANELED AND PARTLLY GLAZED- CASH CABIN SIDE WALL WITH DOOR- (7'-0" ht.)</u> Providing and fixing double skin full height partly glazed partition made out of aluminium hollow section of 50X25X1.5 mm as internal framed structure spaced not more than 600 mm. c/c both ways, double skin partition fixed to aluminum frame made of 6 mm. thk. Approved ply (IS:303), finished both side with approved laminate with 1.0 mm thickness including the glazing part made with 06 mm thick clear glass of Modi/saint gobin with etching film in the partition as per drawing size including supply and fixing of hardware all complete with as per drawing.	SFT	89.00		

5	<u>CASH COUNTER-</u> Providing and fixing cash counter in two tier with 2'-6" wide working counter a 8'-6" height and 1'-0" wide service counter a 3'-6" height made with 19 mm thk board of approved make finished with 1.0mm thick laminate of approved make and shade including the supply and fixing of slid in telescopic key board of EBCO/Efficient Gadgets ,3 nos drawer with lock of godrej make, foot rest ,CPU stand with the provision of hole for wire. The inner side of the counter shall be painted with minimum 2 coats of premium 1 st quality paint as per drawing and instructions of the Architect/Bank.	RFT	5.00		
6	<u>GENERAL COUNTER WITH OFFICER TABLE- (8' long, 4'-0" ht.)</u> Providing and fixing double skin low height partly glazed partition made out of aluminum hollow section of 50X25X1.5 mm as internal framed structures paced not more than 600 mm. c/c both ways, double skin partition fixed to aluminum frame made of 6 mm.thk. approved ply (IS:303), finished both side with approved laminate with 1.0 mm.thickness including the glazing part made with 12 mm thick clear glass of Modi/ saint gobin with etching film in the partition as per drawing size including supply and fixing of hard ware all complete with 3.0 Nos. Drawer cum cabinet unit of approx. overall size of 400x600x725 mm.(h) of 19 mm. thk. plywood. The unit shall comprise of 3.0 drawer, 3.0 cabinet with approved Shade with telescopic drawer slides. The drawer & cabinet unit shall be finished with 1.0 mm laminate & inside surfaces finished with 0.70 mm liner laminate. The quoted price should include cost of teak wood moulding / laminate to edges, wood lipping, multi locks of Godrej/EBCO make & other necessary hard ware accessories including SS handles, PVC wire manager, key board tray, CPU trolley, foot rest etc. of approved quality. All the ply edges should be lipped & finished with laminate. The rate also includes the cost of hard wares like hinges, tower bolts, handles, magnets, wire manager etc as per drawing.	SFT	32.00		
7	<u>PARTITION WALL INCLUDING WICKET GATE- (13'-6" long, 4'-0" ht.)</u> Providing and fixing double skin full height partly glazed partition made out of aluminium hollow section of 50X25X1.5 mm as internal framed structure spaced not more than 600 mm. c/c both ways, double skin partition fixed to aluminium frame made of 6mm. thk. Approved ply (IS:303), finished both side with approved laminate with 1.0 mm. thickness including the glazing part made with 06 mm thick clear glass of Modi/saint gobin with etching film in the partition as per drawing size including supply and fixing of hardware all complete with as per drawing	SFT	54.00		
8	<u>DOOR CLOSURE-</u> Providing and fixing Door Closures for door. The work to be completed as par specification and design.	EACH	1.00		
9	<u>MORTISE LOCK-</u> Providing and fixing Mortise Lock for door. The work to be completed as par specification and design.	EACH	1.00		
10	<u>NOTICE BOARD-</u> Providing and fixing notice board of size 4'0"X3'0". Complete as per drawings and instructions of the Architect/Bank.	EACH	1.00		
11	<u>WRITING DESK-</u> Providing and fixing writing desk of size(4'-0"x1') made with 19 mm thk. Block board with partition for leaflet as per drawings and instructions of the Architect/Bank.	EACH	1.00		

12	<u>SUGGESTION BOX / CHEQUE DROP BOX-</u> Providing & fixing box made up of 19 mm. thk. Ply wood frame work, 6/12 mm. thk. Ply wood back as required as per design. Good quality black board shutter should be fixed on brass hinge should be finished with 1.0 mm. thk. Laminate from external side & oil paint laminated surfaces. All exposed edges of ply wood should have lipping patti on it. Lipping patti should be finished with French polish on it. The cost should include necessary handles, magnetic catches, Godrej make locks etc. complete as per design.	EACH	2.00		
13	<u>ALUMINIUM GRILL ABOVE CASH CABIN-</u> Providing and fixing in position readymade anodized aluminum grill of 3"X3" size approved design and quality over cash work station fixed with Malaysian sal wood frame work of approved shape, all complete as directed.	EACH	40.00		
14.	<u>2' x 2' GRID FALSE CEILING</u> Providing, fabricating and erecting lay in type modular False ceiling of 600x600 mm grid. The boards are of size 595 mm x 595 mm x 8-12 mm thk gypsum tiles. The rate shall include the additional cost of Tee and L supports and other accessories near the ends/ odd size edges/corners. Provide additional length support from the ceiling to the false ceiling grid wherever necessary, making necessary openings for electrical light fittings, alarm detectors and any other fixtures. No extra payment for making openings in the panel/grids for the purpose of light fittings. Item rate shall include all the taxes, transportation, erection, loading and unloading and any other incidental expenditure for completing the work.	SFT	779.00		
15.	S/F/F (2.0 Nos., size 9'-0" x 4'-0") aluminum sliding 2 track windows made of 32 mm thick aluminum section, made of Hindalco or Jindal with 4.0 mm plane glass-do-E/I	SFT	72.00		
	TOTAL AMOUNT (A)				

PROFORMA FOR FINANCIAL BID (PART-II (b))

ESTIMATE FOR QUANTITY FOR ELECTRICAL WOK OF JHARKHAND GRAMIN BANK – KORAMBHEY BRANCH					
S NO	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
	ELECTRIC CIRCUIT WIRING				
1	63A 4P Main Switch with M.S Enclosure	EACH	1.00		
	Supply, installation, testing and commissioning of 63A 4P Main Switch with M.S Enclosure. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
2	32A 4P Changeover Switch with M.S Enclosure	EACH	1.00		
	Supply, installation, testing and commissioning of 32A 4P Changeover Switch with M.S Enclosure. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
3	63A 4P Busbar chamber with M.S Enclosure	EACH	1.00		
	Supply, installation, testing and commissioning of 63A 4P Busbar chamber with M.S Enclosure. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
4	Service Wires (Meter to Main Electric Panel)	RMT	30.00		
	Supply & laying for sub main from Meter to L.T line panel of following sizes and core PVC/XLPE insulated PVC sheathed, heavy duty, armored electrical cable with aluminum conductor for working voltage up to and including 1100 volts. (Conforms to IS:1554, part-1) proper laying on wall or roof, thumbnail clipping and use proper size cable gland for cable sport etc. as required. all complete as per instructions of Elec. Er. / Architect. Size : 25 sq.mm, 3.5 core LT Alum. Arm. Cable				
5	Submain Wiring (From Busbar to UPS Charging Input & Output)	RMT	15.00		
	Supply and laying of 2X6 + 1X2.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
6	Submain Wiring (From Busbar to Light MCB DB + UPS Output to UPS MCB DB)	RMT	25.00		
	Supply and laying of 2X4 + 1X2.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				

7	Submain Wiring (From Busbar to AC MCB DB	RMT	15.00		
	Supply and laying of 4X6 + 1X2.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
8	Circuit Wiring (From Light MCB DB to Light/Fan Switch Boards)	MTR	110.00		
	Supply and laying of 2X2.5 + 1X1.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
9	Circuit Wiring (From Computer/UPS MCB DB to Computer Power switch boards)	MTR	110.00		
	Supply and laying of 2X2.5 + 1X1.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
10	Circuit Wiring (From AC MCB DB to AC power boards)	MTR	80.00		
	Supply and laying of 2X4 + 1X2.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
11	Circuit Wiring (From Light MCB DB to Glow Sign Board)	RMT	25.00		
	Supply and laying of 2X2.5 + 1X1.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
12	Light Point Wiring (1 Light controlled by 1 Switch)	EACH	30.00		
	Supply and laying of 2X1.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				

13	Ceiling/Wall/Exhaust Fan Point Wiring	EACH	18.00		
	Supply and laying of 3X1.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. including fixing 6A 3 pin modular Socket in mounting box. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
14	Modular Switch Boards (For Fan & Light)	EACH	10.00		
	Supply and fixing required size modular switch board for fan and light point with 1 Nos. 6A Switch + 1 Nos. 6A Socket + Indicator. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
15	Modular UPS Power Switch Boards (For Computers)	EACH	7.00		
	Supply and fixing required size modular switch board for computers with 4 Nos. 6A Socket + 1 Nos. 16A Switch + Indicator. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
16	Modular UPS Power Switch Boards (For IT HUB & CCTV)	EACH	1.00		
	Supply and fixing required size modular switch board for IT Hub with 3 Nos. 6A Socket + 1 Nos. 16A Socket + 1 Nos. 16A Switch + Indicator. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
17	32A Industrial Metal Clad Plug & Socket with 32A-63A DP MCB (For UPS Input & Output Power)	EACH	2.00		
	Supply and fixing 32A Industrial metal clad plug and socket for UPS input & Output power supply. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
18	AC POWER BOX	EACH	3.00		
	Supply and fixing AC Power box with 20A Socket and SP MCB. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
19	Light MCB Distribution Board	SET	1.00		
	Supply and fixing SPN Light MCB DB comprising of following: INCOMMING : 32A DP MCB : 1 Pcs OUTGOING : 10A SP MCB : 6 Pcs The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
20	Computer/UPS Power MCB Distribution Board	SET	1.00		
	Supply and fixing main SPN Computer MCB DB comprising of following: INCOMMING : 32A DP MCB : 1 Pcs OUTGOING : 10A-16A SP MCB : 6 Pcs The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
21	Air-Condition Power MCB Distribution Board	SET	1.00		

	Supply and fixing main SPN Computer MCB DB comprising of following: INCOMMING : 63A 4P MCB : 1 Pcs OUTGOING : 20A SP MCB : 2 Pcs The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
	INSTALLATIONS & FIXTURES				
22	1200mm Ceiling Fan	EACH	8.00		
	Supply and fixing 1200mm Ceiling Fan. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
23	Ceiling Fan Regulator :	EACH	8.00		
	Supply and fixing Ceiling Fan electronic regulator. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
24	300mm Exhaust Fan :	EACH	2.00		
	Supply and fixing 300mm Exhaust fan. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
25	20W LED Batten Light :	EACH	20.00		
	Supply and fixing 20W LED Batten Light. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
26	1 Feet 8W LED Tube light (In Cash Counter) :	EACH	2.00		
	Supply and fixing 1 feet 8W LED tube light. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
	LAN CABLING WORKS				
27	CAT6 Data Cabling :	MTR	80.00		
	Supplying and laying CAT 6 network cable for data transmission in 20mm PVC casing. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
28	CAT6 Information Outlet Box (I/O Box) :	EACH	6.00		
	Providing & fixing CAT6 I/O Box. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
29	RJ45 Jack :	EACH	6.00		
	Providing & fixing RJ45 jack. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
30	9U IT Network Hub/Rack :	EACH	1.00		
	Providing & fixing 9U IT networking hub/rack. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
31	CAT6 2 Mtr. Patch Cord :	EACH	6.00		
	Providing & fixing cat6 2 mtrs. Patch cord. The rate should include the cost of all materials, labour, transportation, scaffolding, carting away the debris and cleaning the floor etc.				
	TOTAL AMOUNT				

SUMMARY OF EXPENDITURE

Estimated Expenditure for Interior Furnishing Work (TOTAL- A)	Rs.	
Estimated Expenditure for Electrical & LAN Cabling Work (TOTAL- B)	Rs.	
TOTAL (A+B)	Rs.	
ADD SGST @ 9%		
ADD CGST @ 9%		
GRAND TOTAL AMOUNT		


Amount in Word- Rupees.....

Sign & Seal of the Contractor : -

Name & Address of the contractor : -

Date:

ROUGH LAYOUT OF KORAMBHEY BRANCH

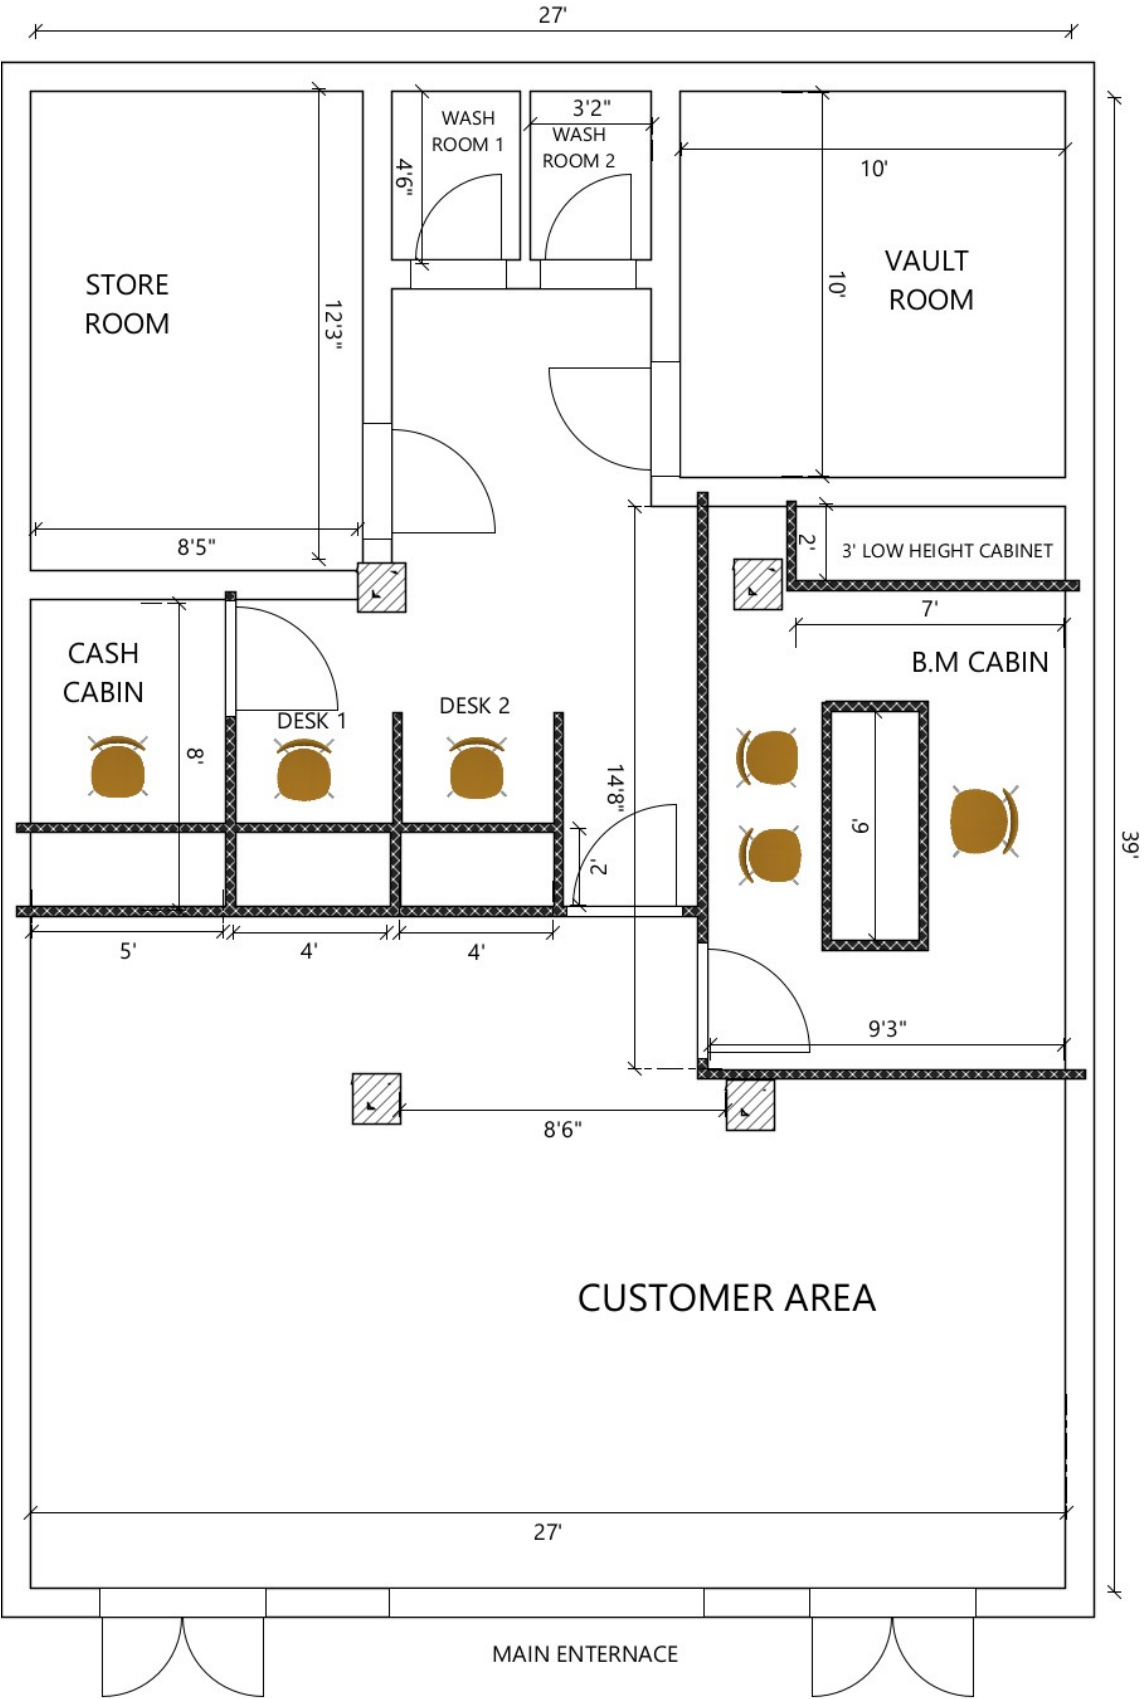

WOOD WORK REQUIRED



झारखण्ड ग्रामीण बैंक
Jharkhand Gramin Bank
Scheduled Bank owned by Government

क्षेत्रीय कार्यालय
बाबूगाँव, शिवमंदिर चौक
कोर्रा, हजारीबाग
पिन- 825303, झारखण्ड

Regional Office
Babugaon, Shiv Mandir Chowk
Korrah, Hazaribagh
PIN-825303 (Jharkhand)

LIST OF APPROVED MATERIAL MAKE FOR INTERIOR FURNISHING WORKS		
1	Block Board	Greenply/Century/Duro/Archid/Mayur
2	Ply Board	Greenply/Century/Duro/Archid/Mayur
3	Laminate	Greenlam/AICA Sunmica/Archid/Century/Merino
4	False Ceiling	Saint Gobain/USG Boral/Armstrong
5	Float Glass	Modiguard/Saint Gobain/AIS/Gold Plus
6	Door Closer/Floor spring	Hardwyn/Godrej/Amar/SaintGobain
7	Drawer & Keyboard,Slide	EBCO(Telescopie)/Godrej
8	Glue for fixing	Fevicol/Mahacol/Jivanjor
9	Mortice Latch & Lock	Godrej/Link
10	Aluminium Sections	Jindal/Indal/Hindalco/Equivalent
11	Emulsion Paint/Plastic Paint/Distemper	Nerolac/ICI/Berger/Asian
12	Vertical/Horizontal/Roller Blinds	Vista/Marvel/Shivam Blind

Note: Material used other than above mentioned items must be approved from the Bank/Architects.

LIST OF APPROVED MATERIAL MAKE FOR ELECTRICAL/ LAN CABLING WORKS		
1	Rigid PVC Conduit	AKG/Shakti/Anchor/Polycab/GM/Equivalent
2	Accessories for conduit works	AKG/Shakti/Anchor/Polycab/GM/Equivalent
3	Copper Conductor PVC insulated 1100V grade multi stranded FRLS Flexible wire only.	Finolex/Mescab/Polycab/KEI/Havells/Equivalent
4	Switches, Switch Plates, Boxes etc.	Legrand/Roma/L&T/Schneider/Havells/GM/Equivalent
5	Main Switch fuse upto 63 Amps A.C.230V	Legrand/LauritzKnudsen(L&T)/Siemens/Schneider/ABB/Benlo/BCH/Standard/Equiovalent
6	Main switch above 63 Amps-A.C.230V	Legrand/LauritzKnudsen(L&T)/Siemens/Schneider/ABB/Benlo/BCH/Standard/Equiovalent
7	HRC Fuses	Legrand/LauritzKnudsen(L&T)/Siemens/Schneider/ABB/BCH/E quiovalent
8	MCBs, MCCBs, ELCBs and DBs(Double Door type only)	Legrand/LauritzKnudsen(L&T)/Siemens/Schneider/ABB/BCH/E quiovalent
9	Main Cables PVC Insulated 1.1 kV grade FRLSXLPE only PVC armored cable For 1.1 KV as per I SI1554.	Havell's/Mescab/RRKabel/KEI/Polycab/Equivalent
10	Cable Glands Double compression type:	Dowel/Siemens/Comet/Gripwel/Equivalent
11	Cable Lugs	Dowells/3-D/Equivalent
12	Metal Clad Sockets/Plugs	Legrand/LauritzKnudsen(L&T)/Siemens/Schneider/ABB/Benlo/BCH/Standard/Equiovalent
13	Batten holder, Angle holder, Ceiling Rose	Legrand/Roma/L&T/Schneider/Havells/GM/Equivalent
14	LED Light Fittings & Fixtures	Philips/Crompton/Bajaj/Havells/GM/Equivalent
15	Ceiling Fans	Crompton/Havell's/Bajaj/Polycab/Usha/Equivalent
16	Exhaust Fan	Crompton/Havell's/Bajaj/Polycab/Usha/Equivalent
17	Wall Mounted Fan	Crompton/Havell's/Bajaj/Polycab/Usha/Equivalent
18	4U/9U/12U/15U Rack for jack Panel	D-Link/Vallrack/Legrand/I-Ball/Equivalent
19	Data & Voice(CAT-5E&CAT-6)cabling & its Components	AMP/D-Link/Equivalent

Note: Material used other than above mentioned items must be approved from the Bank/Architects.