



झारखण्ड ग्रामीण बैंक
Jharkhand Gramin Bank
Scheduled Bank Owned by Government

क्षेत्रीय कार्यालय,
द गैलेक्सी, पावर हाउस चौक,
बर्गान्डा, गिरिडीह,
पिन - 815301 (झारखण्ड)

Regional Office,
The Galaxy, Power House Chowk,
Barganda, Giridih,
Pin - 815301 (Jharkhand)

JHARKHAND GRAMIN BANK

REGIONAL OFFICE, GIRIDIH

TENDER FOR INTERIOR & FURNISHING, ELECTRICAL & NETWORKING WORK

Tender No. Accts/04/2026-27

Date 14-Jul-2026

Important Dates:

Opening date for submission of Tender Documents.	14-Jul-2026
Last date for submission of Tender documents	27-Jul-2026, 4:00 PM
Date of opening of Technical Bid.	28-Jul-2026, 11:00 AM
Date of opening of Financial Bid.	28-Jul-2026, 12:00 PM

Address for Communication

Jharkhand Gramin Bank,
Regional Office, Giridih
The Galaxy Building,
Power House Chowk,
Barganda, Giridih- 815301, (Jharkhand)
E-mail ID.- rogiridih.account@jrgbank.bank.in

Disclaimer

The information contained in this Tender document or information provided subsequently to Bidder(s) or applicants whether verbally or in documentary form by or on behalf of Jharkhand Gramin Bank, is provided to the Bidder(s) on the terms and conditions set out in this Tender document and all other terms and conditions subject to which such information is provided. This Tender is neither an agreement nor an offer and is only an invitation by Bank to the interested parties for submission of bids. The purpose of this Tender invitation is to provide the Bidder(s) with information to assist the formulation of their proposals. This Tender invitation does not claim to contain all the information each Bidder may require. Each Bidder should conduct its own investigations and analysis and should check the accuracy, reliability and completeness of the information in this Tender document and where necessary obtain independent advice. Bank makes no representation or warranty and shall incur no liability under any law, statute, rules or regulations as to the accuracy, reliability or completeness of this Tender.

Bank may in its absolute discretion, but without being under any obligation to do so, update, amend or supplement the information in this Tender documents. No contractual obligation whatsoever shall arise from the Tender process until a formal contract is signed and executed by duly authorized officers of the Bank with the selected Bidder.

JHARKHAND GRAMIN BANK

Regional Office, Giridih

Notice Inviting Quotation for Procurement of Interior & Furnishing, Electrical & Networking

Jharkhand Gramin Bank, Regional Office, Giridih, invites sealed tender in two bid system from bonafide supplier /firm for interior furnishing, electrical & networking work as per lay out plan (Annexure – III) and detailed specification mentioned in Annexure-II, at our premises of RAJDHANWAR Branch (Giridih District). Details of premises is as under:

AT+PO+PS- RAJDHANWAR,
District – Giridih
Pin - 825412

The interested firm /Supplier may visit on above address to assess their cost and submit their technical details & financial quotation documents in prescribed format in separate sealed cover. Technical & Financial documents sealed in separate covers must be delivered to the **Regional Office Giridih, Jharkhand Gramin Bank, The Galaxy Building, Power House Chowk, Barganda, Giridih-815301** by **27-Jul-2026 till 4:00 PM**.

The undersigned reserves the right to accept or reject any or all the quotations without citing any reason whatsoever.

1	Name of Work	INTERIOR & FURNISHING, ELECTRICAL & NETWORKING WORK FOR RAJDHANWAR BRANCH.
2	Tender availability	<i>"Tender Section"</i> at jrgbank.bank.in
3	Tender availability Period	14-Jul-2026 to 27-Jul-2026 till 4:00 PM.
4	Last date and time of receipt of bid	27-Jul-2026 Up to 4:00 pm
4	Time allowed for completion	15 Days from the issuance of work order.
5	Tender Cost (Non-refundable)	₹2000/- (Rupees Two Thousand Only) by Demand Draft / Banker's Cheque drawn in favour of Jharkhand Gramin Bank payable at Giridih. (To be enclosed in sealed envelope as a part of technical Bid)
6	Earnest Money Deposit	₹15000/- (Rupees Fifteen Thousand Only) by Demand Draft / Banker's Cheque drawn in favour of Jharkhand Gramin Bank payable at Giridih. (To be enclosed in sealed envelope as a part of technical Bid)
7	Total Estimate value for interior & furnishing, electrical & networking work	₹5,85,290/- (Rupees Five Lakh Eighty Five Thousand Two Hundred Ninety Only) excluding GST (including transportation & labour charges)
8	Total Security Deposit	₹15000/- (Rupees Fifteen Thousand Only) by Demand Draft / Banker's Cheque drawn in favour of Jharkhand Gramin Bank payable at Giridih.

9	Address at which the tenders are to be submitted	The Regional Manager, Jharkhand Gramin Bank, Regional Office, Giridih The Galaxy Building, Power House Chowk, Barganda, Giridih-815301
10	Date and time of opening Tenders	<i>Technical Bid: 28-Jul-2026, 11:00 A.M. Price Bid: 28-Jul-2026, 12:00 P.M.</i>
11	Place of opening tenders	Jharkhand Gramin Bank, Regional Office-Giridih The Galaxy Building, Power House Chowk, Barganda, Giridih-815301
12	Defects Liability Period	<i>12 months from the date of handing over of the project to the satisfaction of Bank</i>
13	Validity of offer	<i>90 days from the date of opening the tenders.</i>
14	Liquidated Damages	<i>At the rate of 0.5% of the contract value per week which subject to a maximum of 5% of the contract Value.</i>
15	Security deposit Retention period	<i>During defects liability period subject to satisfaction of the Bank</i>
16	GST	<i>GST will be paid as extra amount by the Bank. Quoted amount by contractor should be excluding GST.</i>
➤ <i>The vendor has to comply with all the rules and regulations which are necessary for the execution of the contract and shall indemnify JHARKHAND GRAMIN BANK from all legal and monetary liabilities arising due to the violation of the approvals/ permissions, rules and regulations.</i> ➤ <i>Quantities are tentative and can increase or decrease the quantities of any item and contractor has to execute the same at the quoted rates</i> ➤ <i>The contractor shall not submit interim bills. Maximum one bill shall be submitted only after taking actual final measurements after satisfactory completion of works.</i> ➤ <i>Rates shall be inclusive of:</i> <i>Cost for disposing debris and any other unserviceable materials as per direction and inconformity with the Local or any other govt. authorities rules.</i> <i>Cleaning of floors, making good to damaged floor, ceiling, walls, etc., after completion of work</i> <i>In case of any poor quality of work or substandard materials used for the purpose, shall be replaced without any extra cost.</i>		

**Sd/-
Regional Manager**

INSTRUCTIONS TO THE BIDDERS

Scope of Work

Jharkhand Gramin Bank, Regional Office, Giridih invites tenders from bonafide supplier /firm for interior furnishing, electrical & networking work at **RAJDHANWAR** Branch.

Technical Documents

Technical envelope should be super scribed as ***“INTERIOR & FURNISHING, ELECTRICAL & NETWORKING WORK OF RAJDHANWAR BRANCH - Technical Bid”*** and it shall contain the following:

- a) Signed copy of the tender document,
- b) All the documents relating to technical parameters criteria as mentioned in tender document,
- c) Firm / agency profile as in ***Annexure - I***
- d) Tender cost and Earnest Money Deposit / ***Annexure – EMD*** in lieu of EMD (as applicable).
- e) Undertaking on bidder's letter head as per ***Annexure-U***

Bidders will be evaluated on the basis of following technical parameters criteria:

S.NO.	PARAMETER	DOCUMENT REQUIRED
1	The service provider should be a company /firm with authentic PAN	Copy of PAN of the Bidder
2	Bidder must be GST registered entity	Copy of GST certificate of the Bidder
3	Any Govt. / PSU / Bank shall not have blacklisted the company/firm	Declaration on bidder's letter head as per <i>Annexure-D</i>

Commercial Bid / Financial Bid

Financial envelope should be super scribed as ***“INTERIOR & FURNISHING, ELECTRICAL & NETWORKING WORK of RAJDHANWAR Branch – Financial Bid”*** and it shall contain the following:

- a) Commercial Bid / Financial Bid as in ***Annexure - II***

Site Visit

The tenderer must obtain himself on his own responsibility and his own expenses all information and data which may be required for the purpose of filling this tender document and enter into a contract for the satisfactory performance of the work. The tenderer is requested to satisfy himself regarding the availability of water, power, transport and communication facilities, the character quality and quantity of the materials, labour, the law and order situation, climatic conditions, liaison requirements with local authorities, traffic regulations in and around the site etc.

The tenderer will be fully responsible for considering the financial effect of any or all the factors while submitting his tender.

Tender Cost

The tenderers are requested to submit the tender cost as prescribed in this tender document in the form of Demand Draft / Bankers Cheque from Scheduled Bank in favour of Jharkhand Gramin Bank, payable at Giridih. Any Bid not accompanied by the requisite Tender Cost shall be deemed to be invalid and will be rejected. *(Exempted for MSE units subject to submission of relevant certificate in this regard).*

Earnest Money

The tenderers are requested to submit the Earnest Money as prescribed in this tender document in the form of Demand Draft or Bankers' Cheque in favour of Jharkhand Gramin Bank, payable at Giridih. EMD (Earnest Money Deposit) in any other form other than as specified will not be accepted. Tender not accompanied by the EMD or *Annexure – EMD* in lieu of EMD (as applicable) shall be rejected. No interest will be paid on the EMD. *(Exempted for MSE units subject to submission of relevant certificate & Annexure – EMD in this regard).*

EMD of unsuccessful tenderers will be refunded/ returned within 30 days of award of work. However, EMD of successful tenderer will be retained as a part of security deposit.

In case of successful bidder / bidders, earnest money deposit will be forfeited by the Bank if: -

- a. After submission of the tender, if the tenderer fails / refuses to comply with any /all of the terms & conditions of the Tender.
- b. The Tenderer withdraws the offer during the validity period.

Security Deposit

Earnest money of successful bidder will be converted to security deposit which will be retained by the Bank for whole defects liability period. In case of MSE bidder, who has not submitted earnest money, bidder has to submit required amount of security deposit in the form of Demand Draft or Bankers' Cheque in favour of Jharkhand Gramin Bank, payable at Giridih. In absence of security deposit, no payment will be released for the work done. No interest shall be paid to the amount retained by the Bank as Security Deposit.

The security deposit would be paid to the contractors after the defects liability period provided he has carried out all the work and attended to all the defects during the defect liability period without any cost to Bank in accordance with the condition of the contract. In case the contractor fails to attend the defects, the Bank shall be entitled to get the defects repaired at the cost of the contractor. The expenditure incurred shall be recovered from the security deposit.

Liquidated Damages

The liquidated damages shall be 0.5% per week subject to a maximum of 5% of the accepted Contract Value.

Rate and Prices:

The rate quoted shall be firm and shall include all costs, allowances, taxes, levies etc. and deduction at source for Income Tax, Work Contract Tax etc. will be made as per statutory rules.

The contractor is required to comply with all act of the Government relating to labour and the rules and regulations made there under from time to time and to submit at the proper times all particulars and statements required to be furnished to the appropriate authorities.

Assignment and Subletting

The whole of work included in the contract shall be executed by the contractor and he shall not directly entrust and engage or indirectly transfer, assign or underlet the contract or any part or share thereof or interest therein without the consent of the Bank.

Variations

No alteration, omission or variation ordered by the Bank shall vitiate the contract. In case the Bank decides, at any time during the progress of works to make any alteration in, or additions to or omissions from the works or any alteration in the kind or quality of the materials to be used therein, the Bank shall give notice thereof to the contractor and contractor shall alter to, add to, or omit from as the case may be in accordance with such notice, but the contractor shall not do any work extra to or make any alterations or additions to or omissions from the works or any deviation from any of the provisions of the contract, stipulations, specifications or contract drawings without previous consent of the Bank and the value of such extras, alterations, additions or omissions shall in all cases be determined by the Bank and the same shall be added to or deducted from the contract value, as the case may be.

Work by other Agencies

The Bank reserves the rights to use premises and any portion of the site for execution of any work, not included in the scope of this contract which it may desire to have carried out by other persons simultaneously and the contractor shall not only allow but also extend reasonable facilities for the execution of such work. Such work shall be carried out in such manner as not to impede the progress of the works included in the contract.

Damage to Persons and Property

The contractor shall indemnify the Bank against all losses and claims in respect of injuries or damages to any person or material or physical damage to any property whatsoever which may arise out of or in consequence of the execution and maintenance of the works and against all claims proceedings, damages, costs, charges and expenses whatsoever in respect of or in relation thereto.

Extension of Time

If, in the opinion of the Bank, the work be delayed for reasons beyond the control of the contractor, the Bank may grant a fair and reasonable extension of time for completion of work. If the contractor needs an extension of time for the completion of work or if the completion of work is likely to be delayed for any reasons beyond the due date of completion as stipulated, the contractor shall apply to the Bank in writing in detail and his justification if any, for the delays.

Arrangements at own cost by contractor

The contractor shall make his own arrangements at his own cost for

- a) water required for the work,
- b) power and supply / distribution system for driving plant or machinery for the work and for lighting purpose,
- c) necessary offices, workshops, stores, shelters, sanitary facilities, canteens and other temporary structures for themselves in connection with the work,
- d) the housing and welfare of his staff and workmen including adequate drinking water facilities,
- e) transport where necessary for his staff and workmen to and from site of work,
- f) any other incidental to the work associated, if any.

Acceptance of Tender

The Bank shall have the right to reject any or all tenders without assigning any reason. The Bank is not bound to accept the lowest or any tender and the tenderer shall have no right to question the acts of the Bank.

Arbitration

Any dispute or difference whatsoever arising between the Parties out of the contract or the validity or breach thereof, shall first be an attempt to mutually settle the same amicably. If, however, the said settlement being not possible shall thereafter be referred to a Sole Arbitrator, jointly appointed by the parties.

The venue of the said Arbitration shall be at Giridih, and the provision of the Arbitration and Conciliation Act, 1996 shall apply to the said proceedings. The Award of the Arbitrator shall be final and binding upon both the parties.

Force Majeure

Neither Party will be liable for losses, defaults, or damages under these contract which result from delays in performing, or inability to perform, all or any of the obligations or responsibilities imposed upon it pursuant to the terms as stated above, due to or because of acts of God, the public enemy, acts of government, earthquakes, floods, strikes, civil strife, fire, technical failure or any other cause beyond the reasonable control of the Party that was so delayed in performing or so unable to perform provided that such Party was not negligent and shall have used reasonable efforts to avoid and overcome such cause. Such Party will resume full performance of such obligations and responsibilities promptly upon removal of any such cause.

In case of force majeure continuing beyond a period of two months, the Bank shall be entitled to terminate this Agreement.

AGREED AND ACCEPTED ALL THE TERMS & CONDITIONS.

(SIGNATURE OF BIDDER WITH SEAL)

(NAME & DESIGNATION)

DATE:

PLACE:

UNDERTAKING
(To be submitted along with the technical Bid)

To
The Regional Manager,
Jharkhand Gramin Bank,
Regional Office- Giridih
The Galaxy Building,
Power house Chowk,
Barganda, Giridih-815301

Dear Sir,

**Reg.: - INTERIOR & FURNISHING WORK, ELECTRICAL & NETWORKING WORK FOR
RAJDHANWAR BRANCH.**

- a. I / We refer to the tender notice vide tender no. _____ dated _____ issued by you for **INTERIOR & FURNISHING WORK, ELECTRICAL & NETWORKING WORK** of RAJDHANWAR Branch.
- b. I / We hereby accept all the terms and conditions along with the specifications, Drawings, Layouts etc. mentioned in the tender documents.
- c. I / We hereby offer to perform, provide, execute, complete and maintain the works in conformity with the drawings, designs, conditions of contracts, specifications, schedule of quantities relating to the works.
- d. I / We have satisfied myself / ourselves as to the site conditions, examined the drawings and all aspects of the tender conditions.
- e. I / We do hereby agree to:
 - i. Abide by and fulfill all the terms and provisions of the said conditions annexed here to,
 - ii. Complete the works within timeline prescribed in the tender document in multiple shifts if considered necessary by the Bank at no extra cost to the Bank.
- f. I / We understand that you are not bound to accept the lowest or any tender you receive.

Yours faithfully,

(SIGNATURE OF BIDDER WITH SEAL)
(NAME & DESIGNATION)
DATE:
PLACE:

EARNEST MONEY DEPOSIT DECLARATION
(Letter to the bank on the bidder's letterhead)

To
The Regional Manager,
Jharkhand Gramin Bank,
Regional Office- Giridih
The Galaxy Building,
Power house Chowk,
Barganda, Giridih-815301

Dear Sir,

Sub: Earnest money deposit declaration.

Whereas I/We (name of agency / firm) _____ have submitted bid for INTERIOR & FURNISHING, ELECTRICAL & NETWORKING WORK of RAJDHANWAR Branch through tender No. _____ dated _____

I/We hereby submit following declaration in lieu of submitting Earnest Money Deposit.

- a) If after the opening of tender, I / We withdraw and / or modify my / our bid during the period of validity of tender (including extended validity of tender) as specified in the tender documents.

And / Or

- b) If, after the award of work, I / We fail to start the work within 7 days,

And / Or

- c) If, after the award of work, I / We fail to submit security deposit before the deadline defined in the tender documents.

I/We shall be suspended for one year and shall not be eligible to bid for Jharkhand Gramin Bank's tender from date of issue of suspension order.

Yours faithfully,

(SIGNATURE OF BIDDER WITH SEAL)

(NAME & DESIGNATION)

DATE:

PLACE:

DECLARATION

To
The Regional Manager,
Jharkhand Gramin Bank,
Regional Office- Giridih
The Galaxy Building,
Power house Chowk,
Barganda, Giridih-815301

Dear Sir,
Sub: **Your tender notice for INTERIOR & FURNISHING, ELECTRICAL & NETWORKING WORK
OF RAJDHANWAR BRANCH**

With reference to the above tender notice, having examined and understood the instructions, terms and conditions forming part of the tender forms, we hereby enclose our offer for **INTERIOR & FURNISHING, ELECTRICAL & NETWORKING WORK** of RAJDHANWAR Branch as detailed in your above-referred tender notice.

We confirm that any Govt./ PSU bank / RRB have not blacklisted / terminated us for any corrupt or fraudulent practices or non-delivery or non- performance or deficiency in service.

We further confirm that the offer is in conformity with the terms and conditions as mentioned in the tender form.

We also confirm that the offer shall remain valid for 90 days from the last date for submission of the offer.

We understand that either the Bank is not bound to accept the offer in part or in full and that, the Bank has the right to reject the offer in full or in part without assigning any reason whatsoever.

We understand that any deviation/exception in any form may result in rejection of bid. We, therefore, certify that we have not taken any exceptions / deviations anywhere in the bid and we agree that if any deviation / exception is mentioned or noticed, our bid may be rejected.

Yours faithfully,

(SIGNATURE OF BIDDER WITH SEAL)
(NAME & DESIGNATION)
DATE:
PLACE:

PROFORMA FOR TECHNICAL BID

	Particulars	To be filled in by the firm
1	Name of the supplier/Agency	
2	Detailed office address of the supplier/ Agency with contact number and name of the contact person	
3	PAN / TAN Number (<i>copy to be enclosed</i>)	
4	Sales Tax/ VAT /GST Registration Number (<i>copy to be enclosed</i>)	
5	Whether bid document of all pages of the terms and Conditions duly signed, in token of acceptance of the same, is attached	
6	Completion certificate for work order of 3 years	
7.	Past experience (<i>relevant certificate to be enclosed</i>)	
8.	Whether declaration (<i>not been blacklisted by PSU Bank</i>) enclosed?	

(SIGNATURE OF BIDDER WITH SEAL)**(NAME & DESIGNATION)****DATE:****PLACE:**



झारखण्ड ग्रामीण बैंक
Jharkhand Gramin Bank
Scheduled Bank Owned by Government

क्षेत्रीय कार्यालय,
द गैलेक्सी, पावर हाउस चौक,
बरगंडा, गिरिडीह,
पिन - 815301 (झारखण्ड)

Regional Office,
The Galaxy, Power House Chowk,
Barganda, Giridih,
Pin - 815301 (Jharkhand)



TENDER DOCUMENT

Interior Furnishing &
Electrical work at



झारखण्ड ग्रामीण बैंक
JHARKHAND GRAMIN BANK

राजधनवार शाखा
RAJDHANWAR Branch

ISSUED BY

Jharkhand Gramin Bank

Regional Office -Giridih, Jharkhand



ESTIMATE FOR INTEIOR FURNISHING WOK OF JHARKHAND GRAMIN BANK - RAJDHANWAR BRANCH					
S NO	DESCRIPTION	UNIT	QTY	RATE (₹)	AMOUNT (₹)
1	LOW HEIGHT PARTITIONS PARTLY paneled and partllly glazed- BM CABIN	SFT	134.00		
	Providing and fixing double skin low height partly glazed partition made out of aluminium hollow section of 50X25X1.5 mm as internal framed structure spaced not more than 600 mm. c/c bothways, double skin partition fixed to aluminium frame made of 6 mm. thk. approved ply (IS:303), finished both side with approved laminate with 1.0 mm. thickness including the glazing part made with 12 mm thick clear glass of Modi/saintgobin with etching film in the partition as per drawing size including supply and fixing of hardware all complete with as per drawing.				
2	FULL HEIGHT PARTITIONS PARTLY paneled and partllly glazed- CASH CABIN	SFT	130.00		
	Providing and fixing double skin full height partly glazed partition made out of aluminium hollow section of 50X25X1.5 mm as internal framed structure spaced not more than 600 mm. c/c bothways, double skin partition fixed to aluminium frame made of 6 mm. thk. approved ply (IS:303), finished both side with approved laminate with 1.0 mm. thickness including the glazing part made with 06 mm thick clear glass of Modi/saintgobin with etching film in the partition as per drawing size including supply and fixing of hardware all complete with as per drawing.				
3	LOW HEIGHT PARTITION - OFFICER TABLES/UPS (As per Lauout Plan)	SFT	56.00		
	Providing and fixing double skin low height partly glazed partition made out of aluminium hollow section of 50X25X1.5 mm as internal framed structure spaced not more than 600 mm. c/c bothways, double skin partition fixed to aluminium frame made of 6 mm. thk. approved ply (IS:303), finished both side with approved laminate with 1.0 mm. thickness including the glazing part made with 12 mm thick clear glass of Modi/saintgobin with etching film in the partition as per drawing size including supply and fixing of hardware all complete with as per drawing.				
4	MAIN ENTRANCE TOUGHENED GLAZED DOOR & PARTITIONS (As per Lauout Plan)	SFT	80.00		
	Providing and fixing Fully glazed toughened glass door & partition for Branch entrance of 12 mm thk toughened glass of approved make with patch fittings. All edges of the glass to be machine polished. Door to be provided with SS handle of approved make. Complete as per drawing size including supply and fixing of hardware all complete with as per drawing.				
5	BRANCH MANAGER TABLE (6'0" X 3'0") (As per Lauout Plan)	EACH	1.00		
	Providing & erecting in position free standing table made of 19 mm plywood (IS : 303) for sides, top & panel, finished with 1.0 mm laminate & inside surfaces finished with 0.7 mm liner laminate. Drawer cum cabinet unit of approx. overall size of 400 x 600 x 725 mm. (h) of 19 mm. thk. plywood. The unit shall comprise of 1 drawer, 1 cabinet with approved shade with telescopic drawer slides. the drawer& cabinet unit shall be finished with 1.0 mm laminate & inside surfaces finished with 0.70 mm liner laminate. The quoted price should include cost of teak wood moulding/laminate to edges, wood lipping, multi locks of Godrej/ebco make & other necessary hardware accessories including SS handles, pvc wire manager, keyboard tray, CPU trolley, foot rest etc. of approved quality. All the ply edges should be lipped & finished with laminate. The rate also include the cost of hardwares like hinges, tower bolts, handles, magnets, wire manager etc. Size : 6'0" X 3'0" Including 10mm clear float glass at top with edge polishing.				
6	OFFICER TABLE (4'6" X 2'6") (As per Lauout Plan)	EACH	2.00		
	Providing & erecting in position free standing table made of 19 mm plywood (IS : 303) for sides, top & panel, finished with 1.0 mm laminate & inside surfaces finished with 0.7 mm liner laminate. Drawer cum cabinet unit of approx. overall size of 400 x 600 x 725 mm. (h) of 19 mm. thk. plywood. The unit shall comprise of 1 drawer, 1 cabinet with approved shade with telescopic drawer slides. the drawer& cabinet unit shall be finished with 1.0 mm laminate & inside surfaces finished with 0.70 mm liner laminate. The quoted price should include cost of teak wood moulding/laminate to edges, wood lipping, multi locks of Godrej/ebco make & other necessary hardware accessories including SS handles, pvc wire manager, keyboard tray, CPU trolley, foot rest etc. of approved quality. All the ply edges should be lipped & finished with laminate. The rate also include the cost of hardwares like hinges, tower bolts, handles, magnets, wire manager etc. Size : 4'6" X 2'6"				
7	CASH COUNTER (As per Lauout Plan)	RFT	5.00		
	Providing and fixing cash counter in two tier with 2'-6" wide working counter at 2'-6" height and 1'-0" wide service counter at 3'-6" height made with 19 mm th board of approved make finished with 1.0mm thick laminate of approved make and shade including the supply and fixing of sliding telescopic keyboard of EBCO/Efficient Gadgets, 3nos drawer with lock of godrej make, foot rest,CPU stand with the provision of hole for wire.The inner side of the counter shall be painted with minimum 2 coats of premium 1st quality paint as per drawing and instructions of the Architect/Bank.				



ESTIMATE FOR INTEIOR FURNISHING WOK OF JHARKHAND GRAMIN BANK - RAJDHANWAR BRANCH					
S NO	DESCRIPTION	UNIT	QTY	RATE (₹)	AMOUNT (₹)
8	12MM GLASS PARTITION (As per Layout Plan)	SFT	14.00		
	Providing and fixing 12mm thick clear glass of Modi/saintgobin in front of cash counter or Officer counter all complete with etching/ polish and hardware as per drawing and instructions of the Architect/Bank. Semicircular cutting in glass for cash transtion shall be provided in cash counters.				
9	B.M SIDE TABLE (As per Layout Plan)	SFT	8.50		
	Providing and fixing Side storage unit of 1'-4" depth or width as mentioned in the drawing made with Front shutter of 19mm th ply and horizontal and verticle rack with 19mm thk. board of approved make all complete with necessary hardware, locking arrangement, handle. There shall be horizontal self. All exposed surfase should be finshed with 1.0mm th laminate of approved make and shade and internal surface should be paint and polished as per drawing and direction. There shall be provision of horizontal and verticle rack inside the alcove as per design.				
10	BACK STORAGE/FULL/LOW HEIGHT CABINETS (As per Layout Plan)	SFT	77.00		
	Providing and fixing Side storage unit of 1'-6" depth or width as mentioned in the drawing made with Front shutter of 19mm th ply and horizontal and verticle rack with 19mm thk. board of approved make all complete with necessary hardware, locking arrangement, handle. There shall be horizontal self. All exposed surfase should be finshed with 1.0mm th laminate of approved make and shade and internal surface should be paint and polished as per drawing and direction. There shall be provision of horizontal and verticle rack inside the alcove as per design.				
11	MORTISE LOCK / NIGHT LATCH LOCK	EACH	3.00		
	Providing and fixing Mortise Lock / Night latch lock for door. The work to be completed as par specification and design.				
12	HYDRAULIC FLOOR SPRING FOR MAIN ENTRANCE GLASS DOORS	EACH	1.00		
	Providing and fixing hydraulic Floor Spring for main Entrance glass doors. The work to be completed as par specification and design.				
13	NOTICE BOARD	EACH	1.00		
	Providing and fixing notice board of size 4'0" X 3'0". complete as per drawings and instructions of the Architect/Bank.				
14	WRITING DESK	EACH	1.00		
	Providing and fixing writing desk of size (4'-0"x1') made with 19 mm th block board with partition for leaflet as per drawings and instructions of the Architect/Bank.				
15	SUGGESTION BOX / CHEQUE DROP BOX	EACH	2.00		
	Providing & fixing box made up 19 mm. thk. plywood framework, 6/12 mm. thk. plywood back as required as per design. Good quality blackboard shutters should be fixed on brass hinges should be finished with 1.0 mm. thk. laminate from external side & oil paint to non laminate ed surfaces. All exposed edges of plywood should have lipping patti on it. Lipping patti should be finished with French polish on it. The cost should include necessary handles, magnetic catches, Godrej make locks etc. complete as per design.				
16	ALUMINIUM GRILL ABOVE CASH CABIN	EACH	39.00		
	Providing and fixing in position readymade anodized aluminum grill of 3"X3" size approved design and quality over cash work station fixed with malaysian sal wood frame work of approved shape, all complete as directed.				
17	TOTAL AMOUNT ₹				
	ADD SGST @ 9% ₹				
	ADD CGST @ 9% ₹				
	GRAND TOTAL AMOUNT ₹				

LIST OF APPROVED MATERIAL MAKE FOR INTERIOR FURNISHING WORKS

1	Block Board	Greenply / Century / Duro / Archid / Mayur
2	Ply Board	Greenply / Century / Duro / Archid / Mayur
3	Laminate	Greenlam / Sunmica / Archid / Century / Merino / Airolam
4	False Ceiling	Saint Gobain / USG Boral / Armstrong
5	Float Glass	Modiguard / Saint Gobain / AIS / Gold Plus
6	Door Closer / Floor spring	Hardwyn / Godrej / Amar / Sandhu / Enox /Ebco
7	Drawer & Keyboard, Slide	Ebco (Telescopic) / Godrej / Enox / Ebco
8	Glue for fixing	Fevicol / Mahacol / Jivanjor
9	Mortice Latch & Lock	Godrej / Link / Enox / Ebco
10	Aluminium Sections	Jindal / Indal / Hindalco / Vikash / Equivalent
11	Emulsion Paint / Plastic Paint / Distemp	Nerolac / ICI / Berger / Asian
12	Vertical / Horizontal / Roller Blinds	Vista / Marvel /Shivam Blind

Note: Material used other than above mentioned items must be approved from the Bank / Architects.

ESTIMATE FOR ELECTRICAL & NETWORKING WOK OF JHARKHAND GRAMIN BANK - RAJDHANWAR BRANCH					
S NO	DESCRIPTION	UNIT	QTY	RATE (₹)	AMOUNT (₹)
A	ELECTRIC CIRCUITWIRING				
1	63A 4P Main Switch with M.S Enclosure : Supply, installation, testing and commissioning of 63A 4P Main Switch with M.S Enclosure. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	1.00		
2	32A 4P Changeover Switch with M.S Enclosure : Supply, installation, testing and commissioning of 32A 4P Changeover Switch with M.S Enclosure. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	1.00		
3	63A 4P Busbar chamber with M.S Enclosure : Supply, installation, testing and commissioning of 63A 4P Busbar chamber with M.S Enclosure. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	1.00		
4	Service Wires (Meter to Main Electric Panel) : Supply & laying for sub main from Meter to L.T line panel of following sizes and core PVC/XLPE insulated PVC sheathed, heavy duty, armored electrical cable with aluminum conductor for working voltage up to and including 1100 volts. (Conforms toIS:1554.part-1) proper laying on wall or roof, thumbnail clipping and use proper size cable gland for cable sport etc. as required. all complete as per instructions of Elec.Er. / Architect. Size : 25 sq.mm, 3.5 core LT Alum. Arm. Cable	RMT	25.00		
5	Submain Wiring (From Busbar to UPS Charging Input & Output) : Supply and laying of 2X6 + 1X2.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface.The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	RMT	25.00		
6	Submain Wiring (From Busbar to Light MCB DB + UPS Output to UPS MCB DB) : Supply and laying of 2X4 + 1X2.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface.The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	RMT	35.00		
7	Submain Wiring (From Busbar to AC MCB DB) : Supply and laying of 4X6 + 1X2.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface.The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	RMT	15.00		
8	Circuit Wiring (From Light MCB DB to Light/Fan Switch Boards) : Supply and laying of 2X2.5 + 1X1.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface.The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	MTR	90.00		
9	Circuit Wiring (From Computer/UPS MCB DB to Computer Power switch boards) : Supply and laying of 2X2.5 + 1X1.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface.The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	MTR	110.00		
10	Circuit Wiring (From AC MCB DB to AC power boards) : Supply and laying of 2X4 + 1X2.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface.The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	MTR	36.00		



ESTIMATE FOR ELECTRICAL & NETWORKING WOK OF JHARKHAND GRAMIN BANK - RAJDHANWAR BRANCH					
S NO	DESCRIPTION	UNIT	QTY	RATE (₹)	AMOUNT (₹)
11	Circuit Wiring (From Light MCB DB to Glow Sign Board) : Supply and laying of 2X2.5 + 1X1.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface.The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	RMT	10.00		
12	Light Point Wiring (1 Light controlled by 1 Switch) : Supply and laying of 2X1.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	20.00		
13	Ceiling/Wall/Exhaust Fan Point Wiring : Supply and laying of 3X1.5 sq mm FRLS stranded Cu. Wire in PVC Conduit through wall / floor / above false ceiling / partition etc. including fixing 6A 3 pin modular Socket in mounting box. The work shall also include for cutting chase for conduits and moulded boxes, if required, in the wall/ floor (Without damaging the building/wall) along with clamping the conduit at every 600 mm interval & finally finishing the surface & matching the same with the existing surface.The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	11.00		
14	Modular Switch Boards (For Fan & Light) : Supply and fixing required size modular switch board for fan and light point with 1 Nos. 6A Switch + 1 Nos. 6A Socket. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	6.00		
15	Modular UPS Power Switch Boards (For Computers / IT HUB / CCTV) : Supply and fixing required size modular switch board for computers with 5 Nos. 6A Socket + 1 Nos. 16A Switch + Indicator. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	4.00		
16	32A Industrial Metal Clad Plug & Socket with 32A-63A DP MCB (For UPS Input & Output Power) : Supply and fixing 32A Industrial metal clad plug and socket for UPS input & Output power supply. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	2.00		
17	AC POWER BOX : Supply and fixing AC Power box with 20A Socket and SP MCB. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	2.00		
18	Light MCB Distribution Board : Supply and fixing SPN Light MCB DB comprising of following: INCOMMING : 32A DP MCB : 1 Pcs OUTGOING : 10A SP MCB : 6 Pcs The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	SET	1.00		
19	Computer/UPS Power MCB Distribution Board : Supply and fixing main SPN Computer MCB DB comprising of following: INCOMMING : 32A DP MCB : 1 Pcs OUTGOING : 10A-16A SP MCB : 10 Pcs The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	SET	1.00		
20	Air-Condition Power MCB Distribution Board : Supply and fixing main SPN Computer MCB DB comprising of following: INCOMMING : 40A 4P MCB : 1 Pcs OUTGOING : 20A SP MCB : 2 Pcs The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	SET	1.00		



ESTIMATE FOR ELECTRICAL & NETWORKING WOK OF JHARKHAND GRAMIN BANK - RAJDHANWAR BRANCH					
S NO	DESCRIPTION	UNIT	QTY	RATE (₹)	AMOUNT (₹)
21	Chemical Earthing : Supply of material and installation of earth electrode made out of 50mm dia class B G.I. pipe in pipe of 3 metre long with arrangements for fitting / termination of G.I. flat with G.I. nut bolts and washers including cost of backfill compound and good quality soil, water puring arrangements, brick masonry enclosure on top with removable CI over complete with labour for excavation of pit conforming to IS: 3043/1987.	SET	1.00		
22	Earthing Distribution Point : SITC of Earth distribution point to be installed in the branch near Main Panel and UPS, comprising of a master insulator with nut bolts.	SET	1.00		
23	Earthing connectivity wire : Supply and laying of 8 SWG Cu cotton coated wire in 20mm dia rigid PVC conduit for earthing from the existing earth pit to the Main panel/UPS earth dostrubution point.	MTR	25.00		
24	Electrical Single Line Diagram (SLD) : Charges for making and submitting of computerised neat & clean Electrical Single Line drawing as per work executed. Drawing completely laminated and fixed near main electric panel area.	SET	1.00		
B	INSTALLATIONS & FIXTURES				
25	1200mm Ceiling Fan : Supply and fixing 1200mm Ceiling Fan. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	8.00		
26	Ceiling Fan Regulator : Supply and fixing Ceiling Fan electronic regulator. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	8.00		
27	300mm Exhaust Fan : Supply and fixing 300mm Exhaust fan. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	2.00		
28	20W LED Batten Light : Supply and fixing 20W LED Batten Light. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	18.00		
29	1 Feet 8W LED Tube light (In Cash Counter) : Supply and fixing 1 feet 8W LED tube light. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	1.00		
30	Call Bell : Supply and fixing cordless call bell. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	1.00		
C	LAN CABLING WORKS				
31	CAT6 Data Cabling : Supplying and laying CAT 6 network cable for data transmission in 20mm PVC casing. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	MTR	135.00		
32	CAT6 Information Outlet Box (I/O Box) : Providing & fixing CAT6 I/O Box. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	MTR	5.00		
33	RJ45 Jack : Providing & fixing RJ45 jack. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	5.00		
34	9U IT Network Hub/Rack : Providing & fixing 9U IT networking hub/rack. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	1.00		
35	CAT6 2 Mtr. Patch Cord : Providing & fixing cat6 2 mtrs. Patch cord. The rate should include the cost of all materials, labour,transportation, scaffolding, carting away the debris and cleaning the floor etc.	EACH	5.00		
36	Networking : Charges for making and submitting of computerised neat & clean LAN cabling drawing showing Modem Rack, I/O box location etc. Drawing completely laminated and fixed near networking hub.	SET	1.00		
37	TOTAL AMOUNT ₹				
	ADD SGST @ 9% ₹				
	ADD CGST @ 9% ₹				
	GRAND TOTAL AMOUNT ₹				

1. I/We agree to supply the above mentioned items in accordance with technical specification for a total price of Rs. (₹
Only) including Transportation & labour charges (for shifting of existing furniture items, if any) etc.
2. I/We also agree and abide with the terms and conditions stipulated in the bid document.
3. I/We hereby confirm that I / We have not changed the units as specified in the tender.
4. I/We hereby confirm that I / We have not changed or modified or deleted the description of the item. If any discrepancy is observed, he should immediately bring to the knowledge of the Bank.
5. I/We agree that L-1 will be selected considering the summation of Sr No.-17 of Furniture Work Estimate & Sr No.- 37 of Electrical & Network Cabling Work Estimate (excl. GST)

(SIGNATURE OF BIDDER WITH SEAL)

(NAME & DESIGNATION)


DATE:

PLACE:

LIST OF APPROVED MATERIAL MAKE FOR ELECTRICAL WORKS

1	Rigid PVC Conduit	AKG / Shakti / Anchor / Polycab / GM / Equivalent
2	Accessories for conduit works	AKG / Shakti / Anchor / Polycab / GM / Equivalent
3	Copper Conductor PVC insulated 1100V grade multi stranded FRLS Flexible wire only.	Finolex / Mescab / Polycab / KEI / Havells / Equivalent
4	Switches, Switch Plates, Boxes etc.	Legrand / Roma / L&T / Schneider / Havells / GM / Equivalent
5	Main Switch fuse up to 63 Amps A.C. 230V	Legrand / Lauritz Knudsen (L&T) / Siemens / Schneider / ABB / Benlo / BCH / Standard / Equiovalent
6	Main switch above 63 Amps-A.C. 230V	Legrand / Lauritz Knudsen (L&T) / Siemens / Schneider / ABB / Benlo / BCH / Standard / Equiovalent
7	HRC Fuses	Legrand / Lauritz Knudsen (L&T) / Siemens / Schneider / ABB / BCH / Equiovalent
8	MCBs, MCCBs, ELCBs and DBs (Double Door type only)	Legrand / Lauritz Knudsen (L&T) / Siemens / Schneider / ABB / BCH / Equiovalent
9	Main Cables PVC Insulated 1.1 kV grade FRLS XLPE only PVC armoured cable For 1.1 KV as per ISI 1554.	Havell's / Mescab / RR Kabel / KEI / Polycab / Equivalent
10	Cable Glands Double compression type:	Dowel / Siemens / Comet / Gripwel / Equivalent
11	Cable Lugs	Dowells / 3-D / Equivalent
12	Metal Clad Sockets/ Plugs	Legrand / Lauritz Knudsen (L&T) / Siemens / Schneider / ABB / Benlo / BCH / Standard / Equiovalent
13	Batten holder, Angle holder, Ceiling Rose	Legrand / Roma / L&T / Schneider / Havells / GM / Equivalent
14	LED Light Fittings & Fixtures	Philips / Crompton / Bajaj / Havells / GM / Equivalent
15	Ceiling Fans	Crompton / Havell's / Bajaj / Polycab / Usha / Equivalent
16	Exhaust Fan	Crompton / Havell's / Bajaj / Polycab / Usha / Equivalent
17	Wall Mounted Fan	Crompton / Havell's / Bajaj / Polycab / Usha / Equivalent
18	4U/9U / 12U / 15U Rack for jack Panel	D-Link / Vallrack / Legrand / I-Ball / Equivalent
19	Data & Voice (CAT-5E & CAT-6) cabling & its Components	AMP / D-Link / Equivalent

Note: Material used other than above mentioned items must be approved from the Bank / Architects.

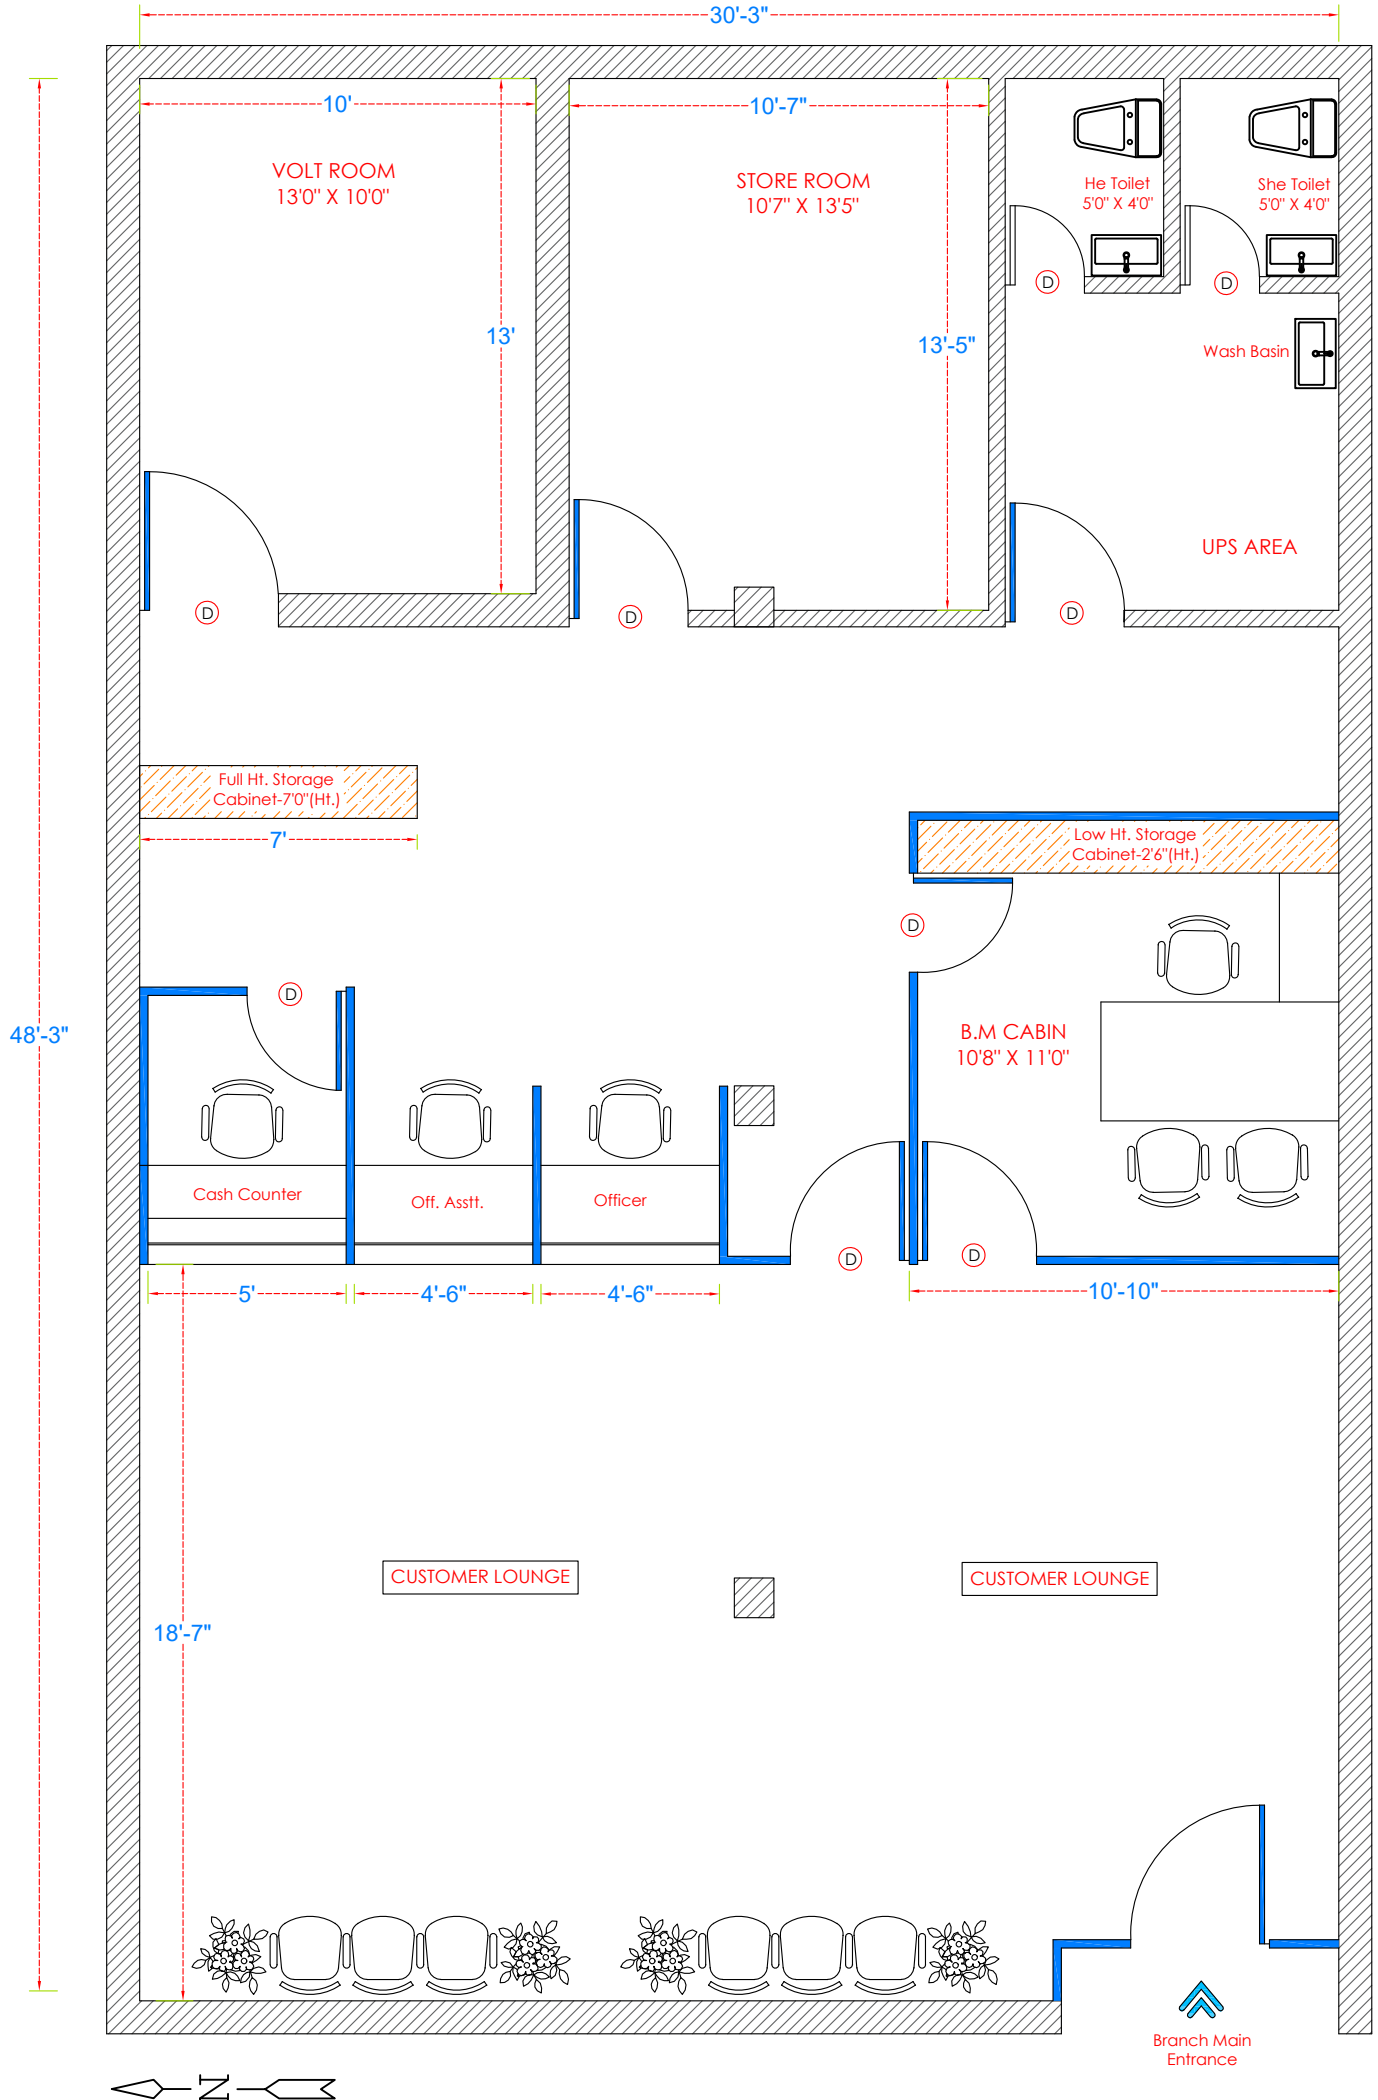

**Interior Furnishing Layout Plan of Jharkhand Gramin Bank
Rajdhanwar Branch (R.O - Giridih)**